



Information

- Floor-mount installation
- Aerated flow rate ~9 gpm @45 psi
- Handshower flow rate ≤1.5 max gpm
- 9-3/4" spout reach
- 30-7/16" to 33-9/16" ~ spout height
- Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve

Finishes





Architectural White





Product Features

- Floor-mount installation
- Aerated flow rate ~9 gpm @45 psi
- Handshower flow rate ≤1.5 max gpm
- 9-3/4" spout reach
- 30-7/16" to 33-9/16" ~ spout height
- Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve


Available Finishes

- Polished Chrome
 G-11254-LM55N-PC
- Brushed Nickel
 G-11254-LM55N-BNI
- Polished Nickel
 G-11254-LM55N-PN
- Olive Bronze*
 G-11254-LM55N-OB*
- Brushed Gold*
 G-11254-LM55N-BAU*

Warranty

Limited lifetime warranty

For complete warranty information go to https://www.graff-faucets.com/en/info/faqs

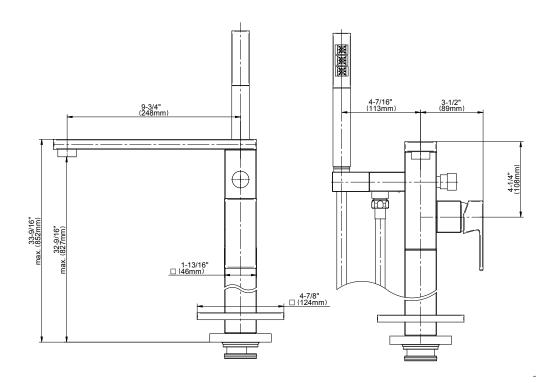

^{*} Special order finish- call for availability





Finishes



Gold



Gold



PVD®



24K Polished 24K Brushed Brushed Brass Architectural Black™



Brushed Nickel



PVD®



Brushed Onyx Rose Gold / Brushed



Gunmetal **PVD®**



Distressed







Matte Black Olive Bronze Onyx PVD® Polished Brass



PVD®



Polished Chrome



Polished Nickel



Rose Gold / Polished Copper PVD®








Product Features

- Mud guard displays minimum and maximum floor depth
- Rough can be installed in any orientation making it convenient to route pipes to the rough
- Trim can be rotated 360 degrees in any directions
- Averages 10 GPM with most trim

Warranty

• Limited lifetime warranty

For complete warranty information go to http://www.graff-faucets.com/en/info/faqs

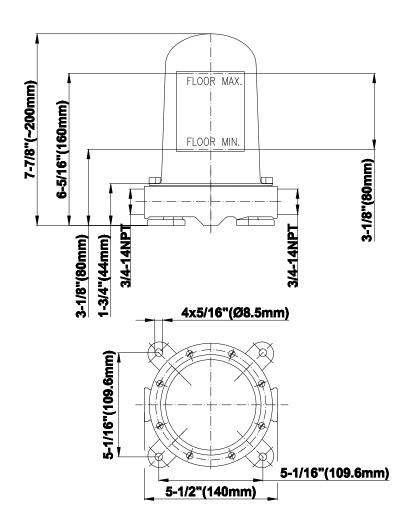





Information

- Floor-mount installation
- Aerated flow rate ~9 gpm @45 psi
- Handshower flow rate ≤1.5 max gpm
- 9-3/4" spout reach
- 30-7/16" to 33-9/16" ~ spout height
- Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve

Finishes





Architectural White





Product Features

- Floor-mount installation
- Aerated flow rate ~9 gpm @45 psi
- Handshower flow rate ≤1.5 max gpm
- 9-3/4" spout reach
- 30-7/16" to 33-9/16" ~ spout height
- Includes handshower with 59" spiral flexible hose
- Optional in-line pressure balancing valve


Available Finishes

- Polished Chrome G-11254-LM55N-PC
- Brushed Nickel
 G-11254-LM55N-BNI
- Polished Nickel G-11254-LM55N-PN
- Olive Bronze*
 G-11254-LM55N-OB*
- Brushed Gold*
 G-11254-LM55N-BAU*

Warranty

Limited lifetime warranty

For complete warranty information go to https://www.graff-faucets.com/en/info/faqs

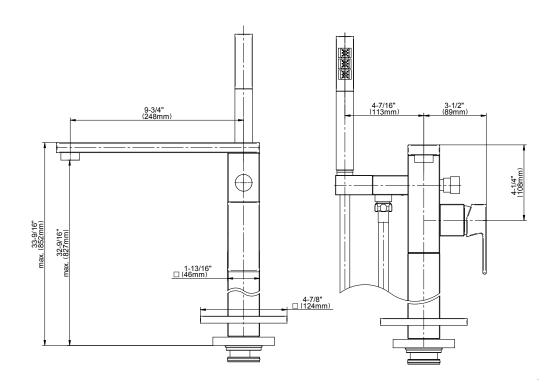

^{*} Special order finish-call for availability