


Qubic M-Series Valve Horizontal Trim with Two Handles

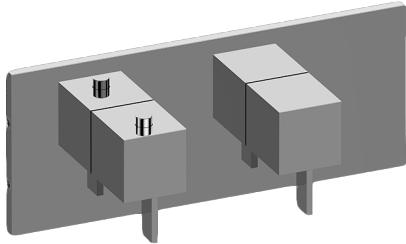

- Two metal handles, decorative trim plate
- Use with M-Series rough valves

- ADA

- 24K Polished Gold
- 24K Brushed Gold
- Architectural Black™
- Brushed Nickel
- Matte Black
- Olive Bronze
- Polished Chrome
- Polished Nickel
- Steelnox® (Satin Nickel)
- Architectural White

Technical drawings of the 1000 Series Single-Door Lock, showing front, side, and detail views with dimensions in inches and millimeters.

Front View Dimensions:

- Top mounting hole spacing: 4-5/16" (110mm) max. / 3-3/8" (85mm) min.
- Bottom mounting hole spacing: 5/16" (8mm)
- Lock body width: 1-9/16" (39mm)
- Lock body height: 2-7/8" (73mm)
- Bottom flange width: 1-9/16" (39mm)
- Bottom flange height: 2-11/16" (68mm)
- Overall bottom height: 3-15/16" (100mm)

Side View Dimensions:

- Top mounting hole spacing: 1-9/16" (39mm)
- Lock body height: 2-7/8" (73mm)
- Lock body width: 1-9/16" (39mm)
- Bottom flange width: 1-9/16" (39mm)
- Bottom flange height: 2-11/16" (68mm)
- Overall bottom height: 3-15/16" (100mm)

Detail View Dimensions:

- Top mounting hole spacing: 1-9/16" (39mm)
- Lock body height: 2-7/8" (73mm)
- Lock body width: 1-9/16" (39mm)
- Bottom flange width: 1-9/16" (39mm)
- Bottom flange height: 2-11/16" (68mm)
- Overall bottom height: 3-15/16" (100mm)

Notes:

- Rough G-8006
- Rough G-8076
- M4
- M40 x 1.5
- 1-1/4" (32mm)