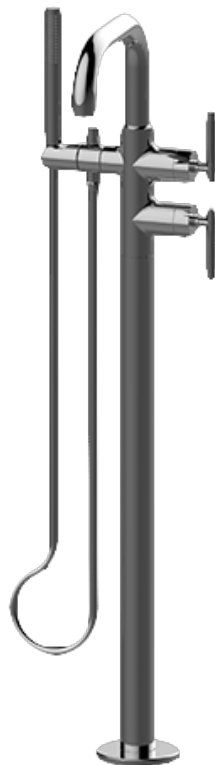


BAGNO
Miscelatore vasca a colonna
(parte esterna)
G-11454-LM57B






GRAFF®



Informazioni

- Floor-mount installation
- Aerated spout flow rate ~7 gpm @ 45 psi
- Handshower flow rate ≤1.5 max gpm
- 8-7/8" spout reach
- 38-1/16"-41-1/4" approximate height
- Includes handshower with 59" spiral flexible hose (PVD finishes use 59" flex hose)
- Optional in-line pressure balancing valve
- ADA

Finiture


							
Oro Lucido 24K	Oro spazzolato 24K	Oro spazzolat o24K/Onyx PVD®	Ottone spazzolato PVD®	Nero_Architec tural Black™	Nichel spazzolato	Onyx spazzolato PVD®	Gunmetal PVD®
							
Nero opaco	Bronzo Oliva	Onyx PVD®	Ottone lucido PVD®	Cromo Lucido	Cromo lucido/Onyx PVD®	Nickel lucido	Nickel lucido/Onyx PVD®



Bianco

G-11454-LM57B-T

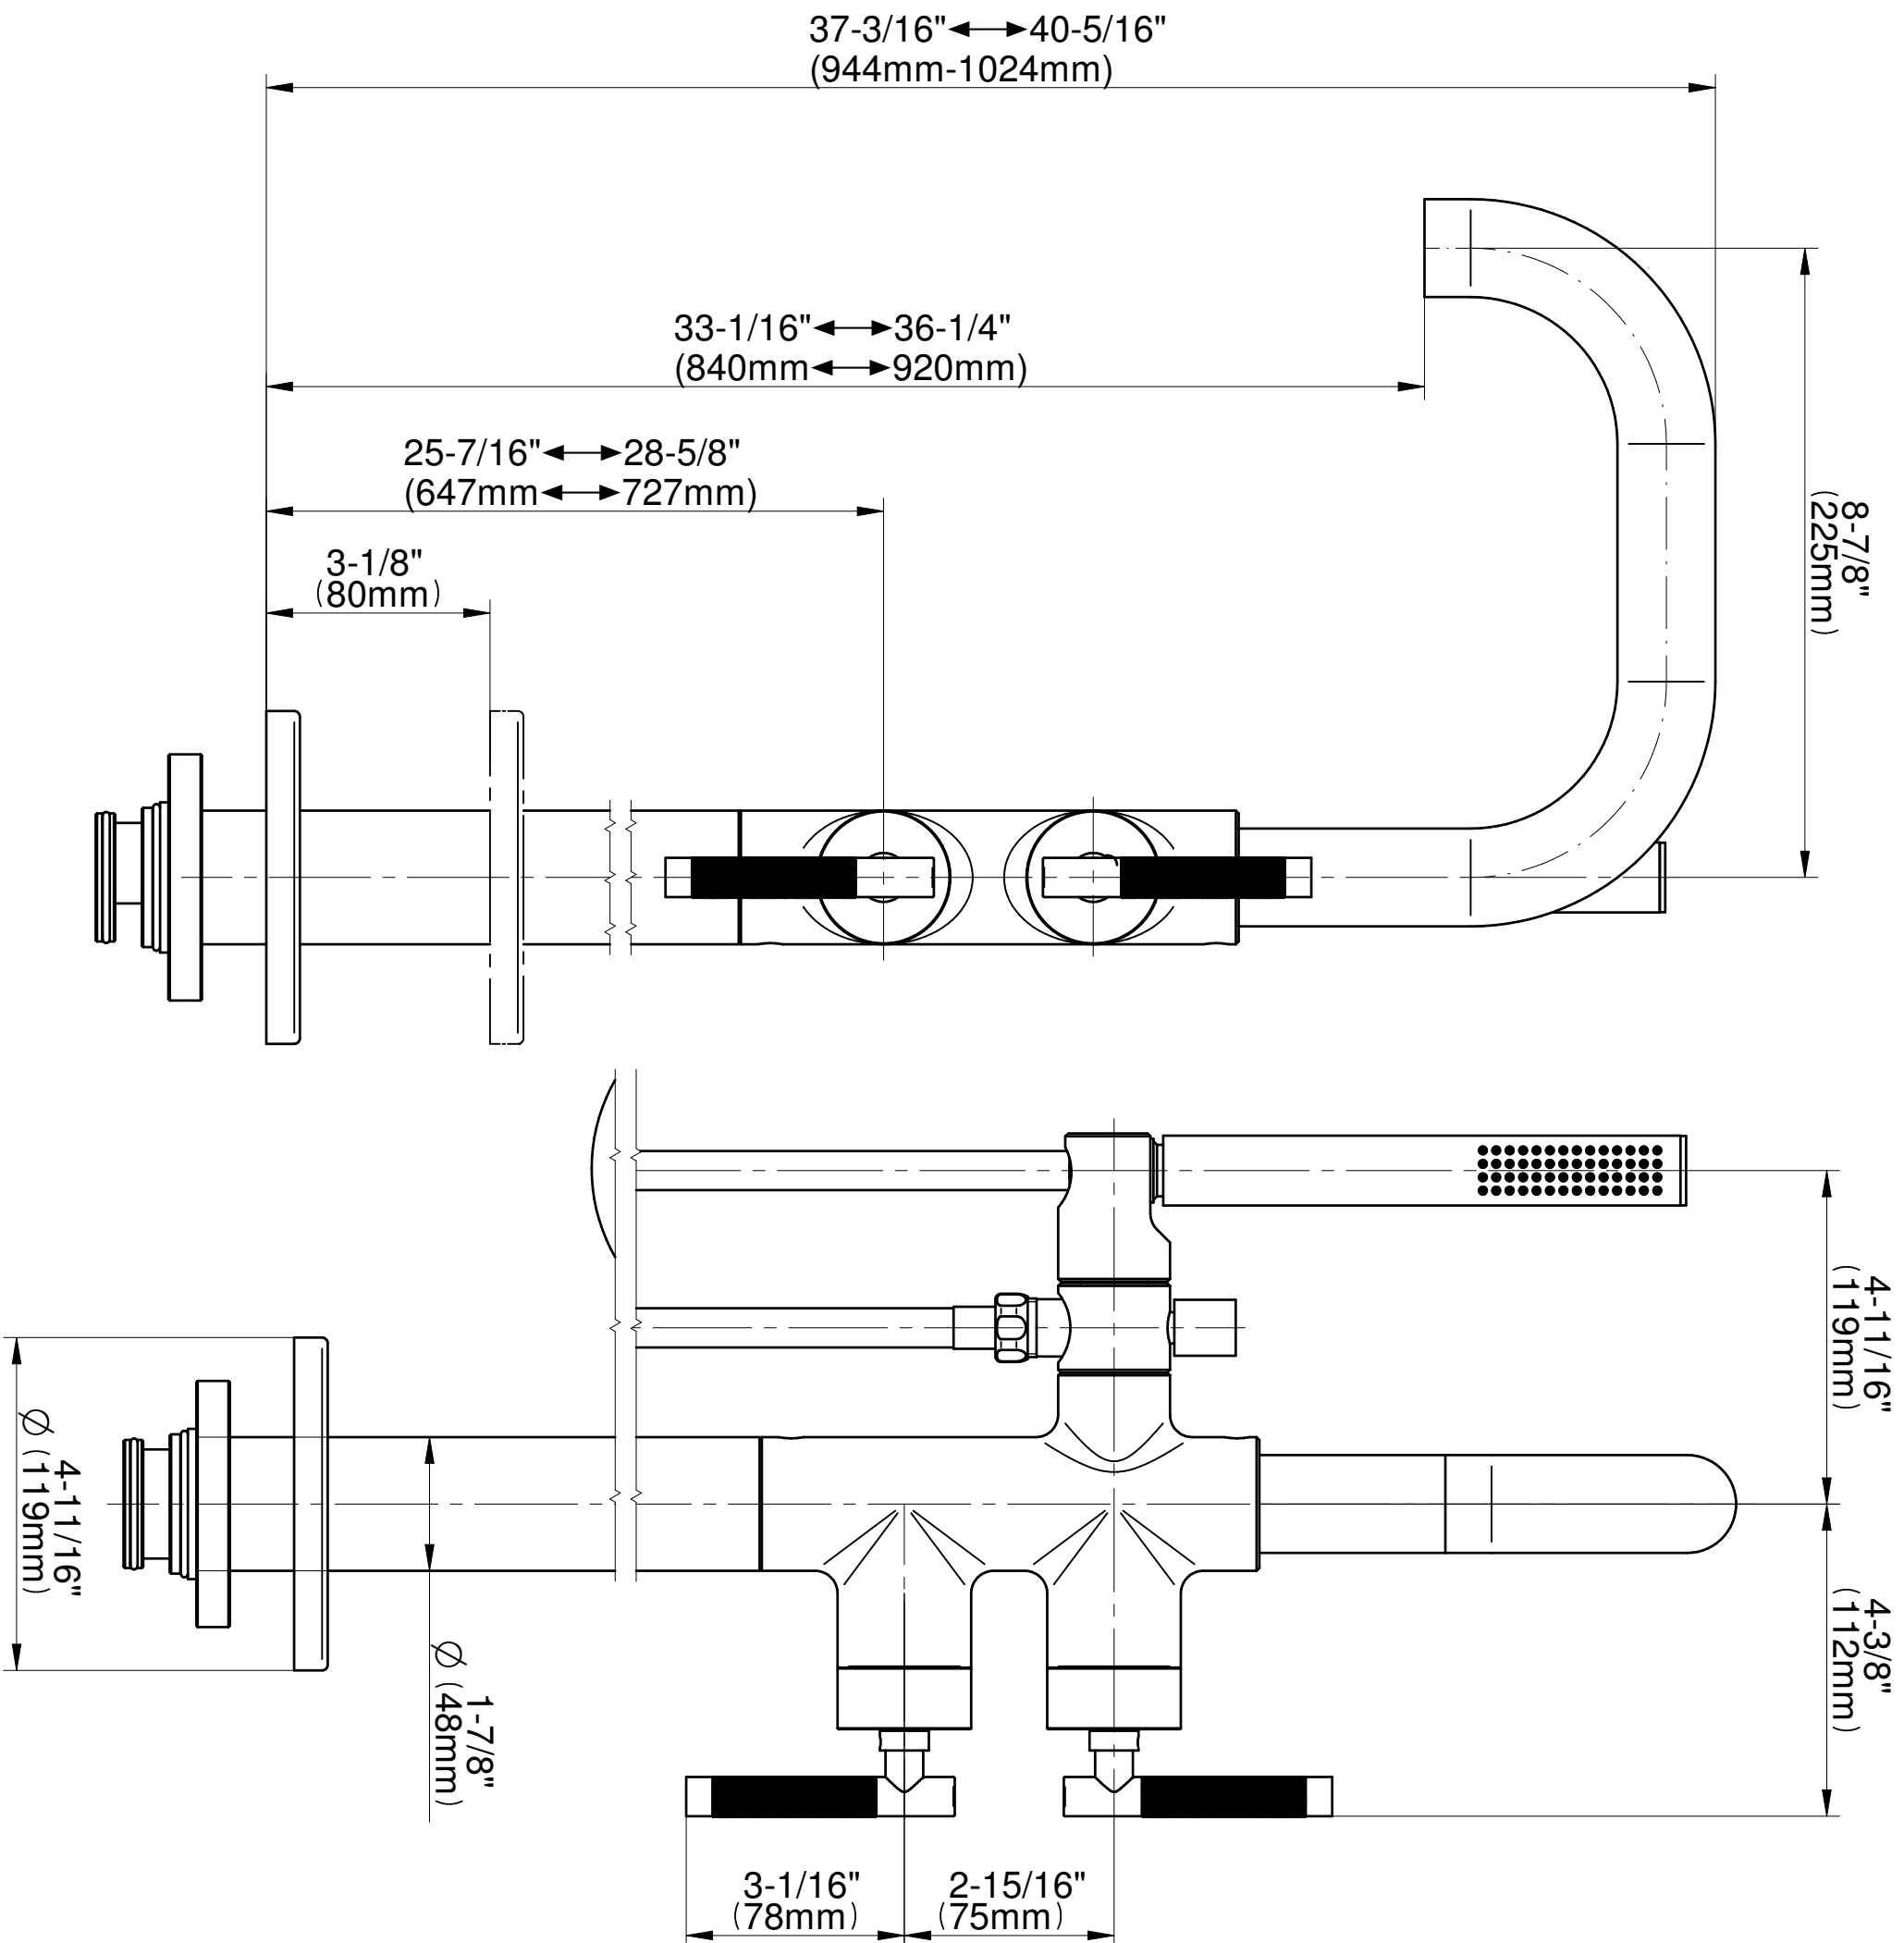Harley Series







Finiture




Oro Lucido
24K



Oro
spazzolato
24K




Oro spazzolat
o24K/Onyx
PVD®




Ottone
spazzolato
PVD®



Nero_Architec
tural Black™



Nichel
spazzolato



Onyx
spazzolato
PVD®



Gunmetal
PVD®



Nero opaco



Bronzo Oliva



Onyx PVD®



Ottone lucido
PVD®



Cromo Lucido



Cromo
lucido/Onyx
PVD®



Nickel lucido



Nickel
lucido/Onyx
PVD®



Bianco

G-1045

Spout Connection Rough



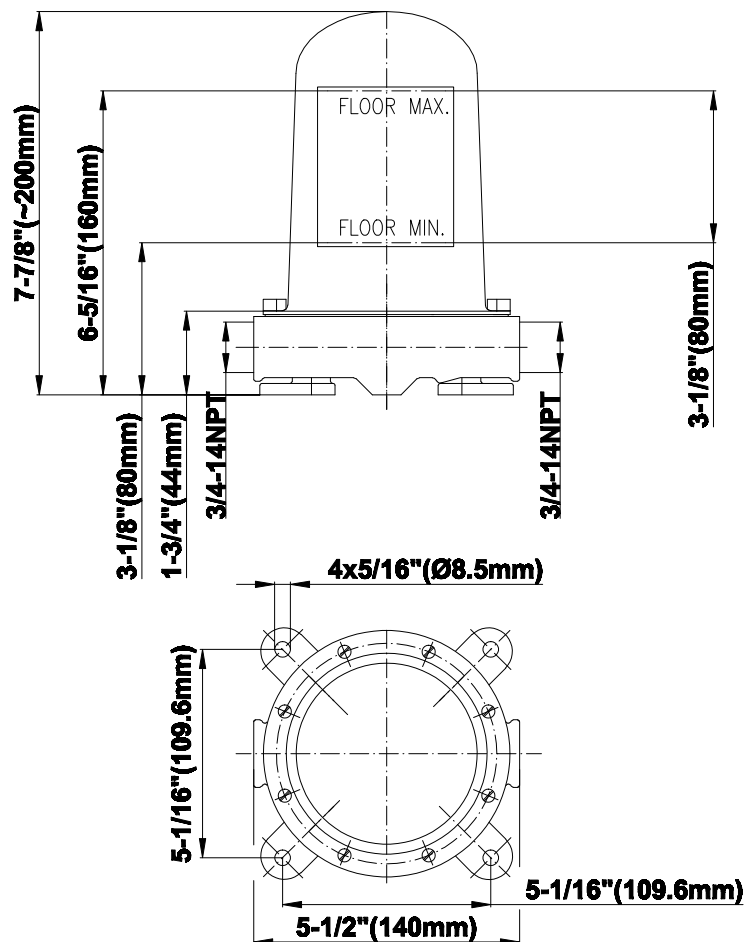
Product Features

- Mud guard displays minimum and maximum floor depth
- Rough can be installed in any orientation making it convenient to route pipes to the rough
- Trim can be rotated 360 degrees in any directions
- Averages 10 GPM with most trim

Warranty

- Limited lifetime warranty

For complete warranty information go to <http://www.graff-faucets.com/en/info/faqs>




The measurements shown are for reference only. Products and specifications shown are subject to change without notice. Revised 07/2017.

www.graff-faucets.com | phone: 800-954-4723

BAGNO
Miscelatore vasca a colonna
(parte esterna)
G-11454-LM57B





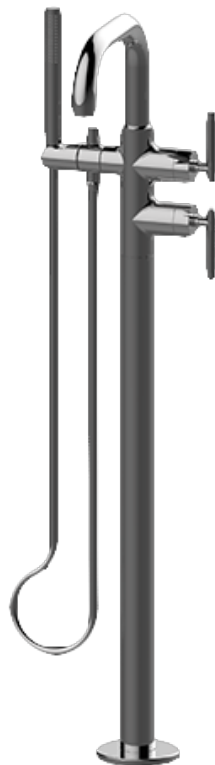
GRAFF®



Informazioni

- Floor-mount installation
- Aerated spout flow rate ~7 gpm @ 45 psi
- Handshower flow rate ≤1.5 max gpm
- 8-7/8" spout reach
- 38-1/16"-41-1/4" approximate height
- Includes handshower with 59" spiral flexible hose (PVD finishes use 59" flex hose)
- Optional in-line pressure balancing valve
- ADA

Finiture

							
Oro Lucido 24K	Oro spazzolato 24K	Oro spazzolat o24K/Onyx PVD®	Ottone spazzolato PVD®	Nero_Architec tural Black™	Nichel spazzolato	Onyx spazzolato PVD®	Gunmetal PVD®
							
Nero opaco	Bronzo Oliva	Onyx PVD®	Ottone lucido PVD®	Cromo Lucido	Cromo lucido/Onyx PVD®	Nickel lucido	Nickel lucido/Onyx PVD®



Bianco

G-11454-LM57B-T

Harley Series

